


zenithinteriors.com

UMBRA Acoustic Light

Zenith

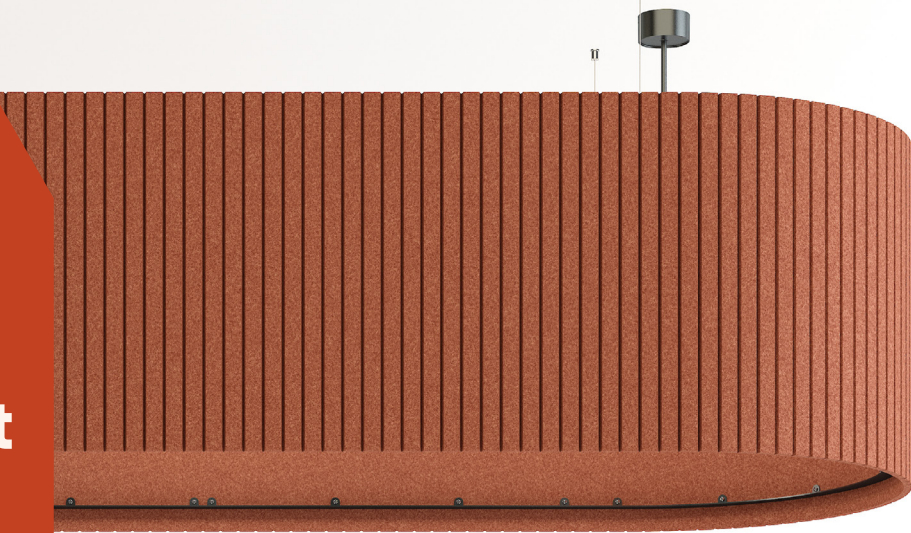

Features:

Amazing, how the light can be focused and directed in a targeted manner using the reflectors, thus guaranteeing the best illumination of workplaces. The processing of the recessed light sources ensures that the light in the acoustic panel almost disappears. The rounded corners of the floating sail create a secure feeling of space.

Design: IMPACT ACOUSTIC

Options:


- Acoustic panel booster made of felt for additional acoustic absorption.

Environmental:

- Cradle to Cradle Certified™
- Product qualifies for LEED v4 specifications on VOC emissions in LEED EQ credit
- VOC Emission CDPH 01350 PASS, ISO 16000 (CDPH/EHLB/STANDARD METHOD V1.2.), EN 16516

Warranty: 12 year product & 2 year lighting

Dimensions

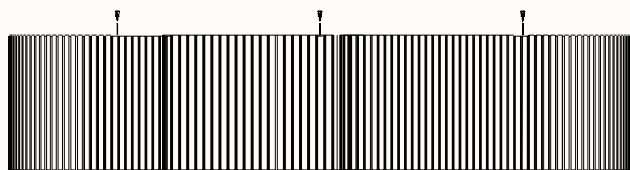

Long 2200

OW 2200mm
OD 800mm
OH 350 or 530mm
Thickness: 24mm

Finishes:


100% PET (min. 60% post-consumer)

ARCHISONIC® is a high-performance sustainable acoustic absorber made from up-cycled plastic bottles.

ARCHISONIC® is manufactured at the highest quality standards, yet slight colour and surface deviations caused by the high degree of recycled fiber are an inevitable part of the product characteristics and do not claim warranty services.

Material varies in colour when shown in monitor or in print.

ARCHISONIC:

					
Shell Pink 102	Jute 920	Soft Coral 516	Ice Blue 304	Winter Sky 410	Spearmint 706
					
Succulent 712	Pacific Ocean 432	Marine Blue 864	Deep Sea 918	Midnight 810	True Navy 194
					
Moss 439	Grove 317	Nordic Pine 311	Fern 180	Sunshine 846	Honeycomb 139
					
Terracotta 239	Electric Orange 464	Hot Pink 140	Poster Red 662	Grape 540	Garnet 724
					
Warm Stone 105	Linen 107	Lichen 160	Snow White 500	Cloud 103	Milk 404
					
Gull 144	Smoke 442	Ground 108	Slate 444	Charcoal 542	Raven 550

Sound Absorption:

DIN ISO 11654

24 mm


aw 0.55 (no airgap)

aw 0.65 (50 mm / 2" air gap)

aw 0.90 (100 mm / 4" air gap)

aw 0.95 (200 mm / 8" air gap)

aw 0.95 (300 mm / 11" air gap)

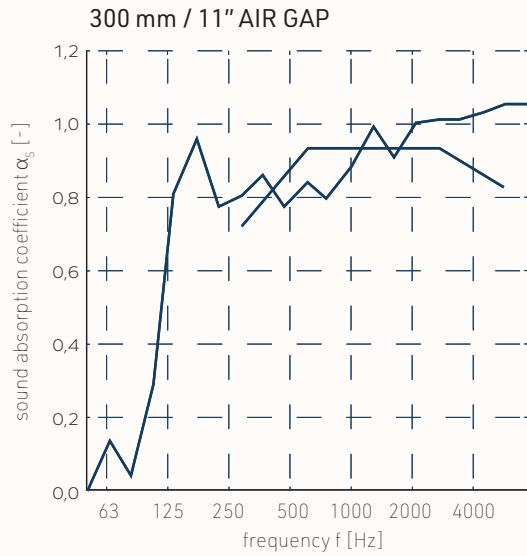

Key Data:

Voltage:

240 V +/- 10% AC/DC

Power:

27 W (small)

light flux:

1900 lm (small)

5700lm (large)

Protection class:

IP 40 / protection class I

Colour reproduction:

CRI > 80

Colour consistency:

< 3 SDMC

Energy efficiency:

A++

Life span:

> 50'000 h (L80 B10)

UGR:

< 16

beam angle:

20° / 40°

Light control:

DALI

27 W (small)

81 W (large)

1900 lm (small)

5700 lm (large)

IP 40 / protection class I

CRI > 80

< 3 SDMC

A++

> 50'000 h (L80 B10)

< 16

20° / 40°

DALI

