

zenithinteriors.com

SPARK Acoustic Lighting

Zenith

Features:

From afar, this rounded lampshade presents a classic appearance, but get closer and experience the inherent playful character that sparks life to any space without intruding. Pick from five different sizes or go all-in combining dimensions for an exciting dynamic.

Design: IMPACT ACOUSTIC

Options:

- Acoustic panel booster made of felt for additional acoustic absorption.

Environmental:

- Cradle to Cradle Certified™
- Product qualifies for LEED v4 specifications on VOC emissions in LEED EQ credit
- VOC Emission CDPH 01350 PASS, ISO 16000 (CDPH/EHLB/STANDARD METHOD V1.2.), EN 16516

Warranty: 12 year product & 2 year lighting

Finishes:



100% PET (min. 60% post-consumer)

ARCHISONIC® is a high-performance sustainable acoustic absorber made from up-cycled plastic bottles.

ARCHISONIC® is manufactured at the highest quality standards, yet slight colour and surface deviations caused by the high degree of recycled fiber are an inevitable part of the product characteristics and do not claim warranty services.

Material varies in colour when shown in monitor or in print.

ARCHISONIC:

					
Shell Pink 102	Jute 920	Soft Coral 516	Ice Blue 304	Winter Sky 410	Spearmint 706
					
Succulent 712	Pacific Ocean 432	Marine Blue 864	Deep Sea 918	Midnight 810	True Navy 194
					
Moss 439	Grove 317	Nordic Pine 311	Fern 180	Sunshine 846	Honeycomb 139
					
Terracotta 239	Electric Orange 464	Hot Pink 140	Poster Red 662	Grape 540	Garnet 724
					
Warm Stone 105	Linen 107	Lichen 160	Snow White 500	Cloud 103	Milk 404
					
Gull 144	Smoke 442	Ground 108	Slate 444	Charcoal 542	Raven 550

Sound Absorption:

DIN ISO 11654

24 mm


aw 0.55 (no airgap)

aw 0.65 (50 mm / 2" air gap)

aw 0.90 (100 mm / 4" air gap)

aw 0.95 (200 mm / 8" air gap)


aw 0.95 (300 mm / 11" air gap)

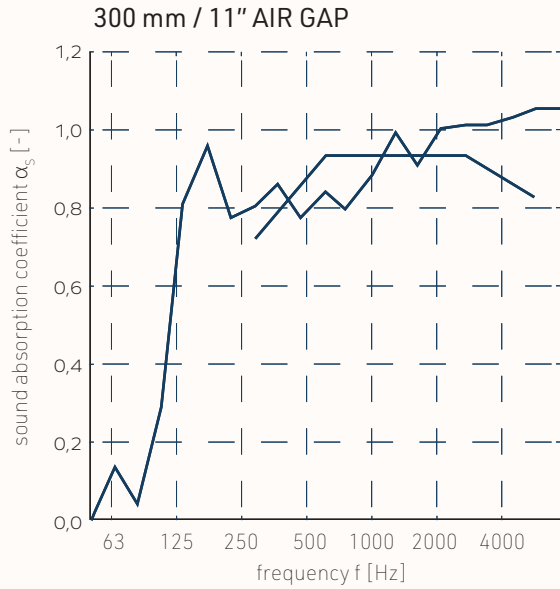

Key Data:


Voltage:	220 – 240 V
Power:	29W
Light distribution:	Direct
Dimming:	Not dimmable (DALI on request)
Diffuser:	Opal (Microprism on request)
Luminous flux of the luminaire:	1508lm
Luminous flux of the light source:	2340lm
Protection class:	I
Colour temperature:	4000K,
Colour consistency:	SDCM3
Life span:	> 50'000 h (L70 B50)

Dimensions




Spark 400

Dia 400mm
OH 270mm




Spark 600

Dia 600mm
OH 400mm




Spark 800

Dia 800mm
OH 530mm



Spark 1200

Dia 1200mm
OH 650mm



Spark 1600

Dia 1600mm
OH 850mm