


KISSEN CONFERENCE Folding Table

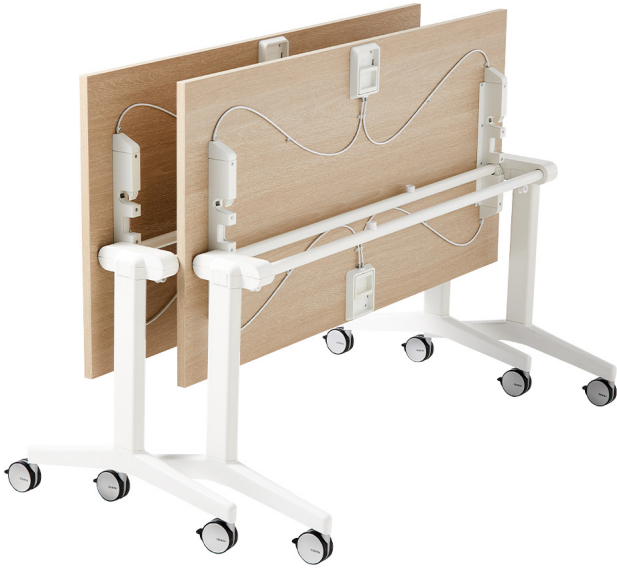

Features:

Kissen Conference folding tables feature a distinctive two-way folding mechanism for convenient activation from either side, ensuring swift usability. With a lightweight frame, easy mobility including table reticulation and cable management, the range is designed for adaptability. Kissen Conference DC powered tables provide occupants with the ability to charge portable devices such as phones, laptops and tablets completely untethered from a mains power source.

Options:

- Round, square and rectangle worktop
- Standard 25mm tops and 33mm tops on request
- Height: 720, 900 & 1050mm
- Linear or 45° Leg: 4 or 6 leg tables
- Lockable castors or glides
- [Cable management](#): Omni access with square edge, sharknose edge or sharknose edge with reduced weight, Fixed Duct & Duct Closed
- [DC Battery](#) (compatible with rectangle table only)

Design: ZENITH DESIGN STUDIO

Certifications: GECA

Warranty: 10 years

Load Rating: Max load including top 120kg, max point load 60kg.

Finishes:

Table top: Laminate, Polytec, Veneer or custom top
Castors: Black for black frames or polished foot and silver for all other frame finishes

Custom colours available upon request
Stocked models and colours may vary


Zenith House Powder Coat:

					
Cool White (Satin/ Matt/ Fine Texture)	Warm White (Matt)	Cool Grey (Satin/ Fine Texture)	Gum Grey (Fine Texture)	Monument (Matt)	Black (Satin/ Matt/ Fine Texture)
					
Chocolate (Matt/ Fine Texture)	Burnt Umber (Matt/ Fine Texture)	Blush Pink (Matt/ Fine Texture)	Rust (Matt/ Fine Texture)	Sky Blue (Matt/ Fine Texture)	Indigo (Matt/ Fine Texture)
					
Olive (Matt/ Fine Texture)					

Fold Mechanism:

	
Black	White

Dimensions




Round Omni Fold

Dia: 1000mm

Height Range: 720mm (Seated Height)

*900mm | 1050mm
(Standing Height)




Square Omni Fold

Width Range: 800 - 900mm

Depth Range: 800 - 900mm

Height Range: 720mm (Seated Height)

*900mm | 1050mm
(Standing Height)



Rectangle Omni Fold

Width Range: 1200 - 2200mm


Depth Range: 700 - 900mm

Height Range: 720mm (Seated Height)

*900mm | 1050mm
(Standing Height)

Note: Legs can be inset, contact us for more information

Stacked Position

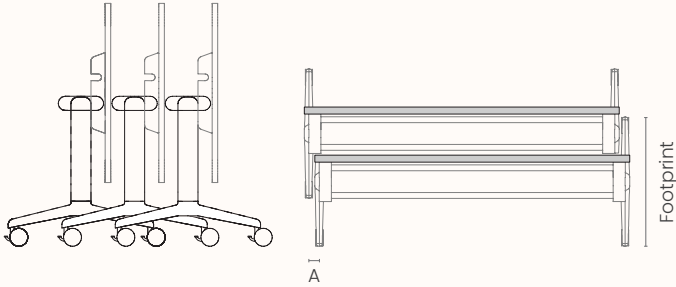


Footprint: 650mm

A: 50mm (Width offset for each table addition)

*Note: For tables 900H and above, a join beam is required.

Cable Management

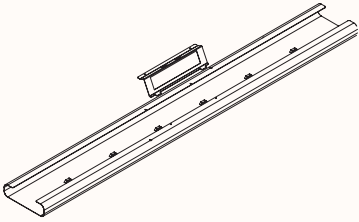


Fixed Duct Omni Fold




Duct Closed



Duct Open

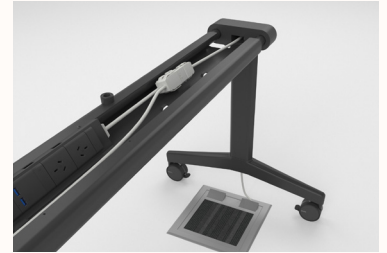

Cable Leg Detail




Rectangle Omni Fold DC

Width Range: 1200 - 2200mm
 Depth Range: 700 - 900mm
 Height Range: 720mm (Seated Height)
 *900mm | 1050mm
 (Standing Height)

Note: Legs can be inset, contact us for more information

Finishes:

DC Battery & Optional PIP Module:




Charging Station:




What is DC?

DC devices, which stands for Direct Current is widely used for low voltage, low current devices such laptops and phones. Traditionally, these devices require additional electronics in the form of a power pack or power charger to step the power down from high voltage to low voltage.

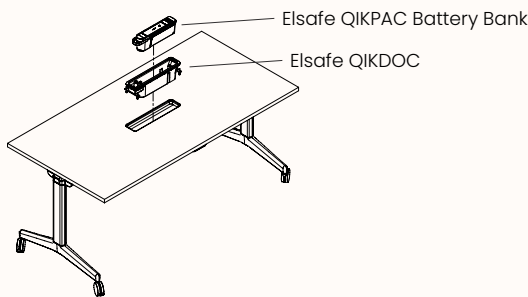


DC Battery:

Each battery provides 240-amp hours of charge and features a single USB-C outlet along with a single USB-B outlet. The battery is housed within a durable carry case and features a handle for portability. The battery features a charge indicator so that the charge level can be checked during use. The battery also features additional outlets on the underside for addition of auxiliary modules such as monitor adapters and power outlets.

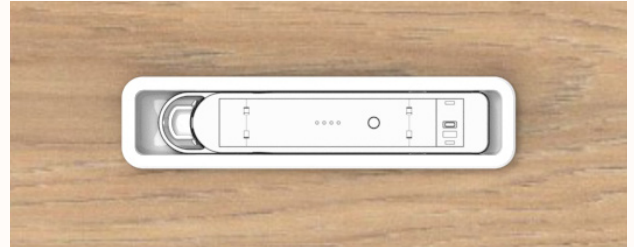

Charging the Battery?

For charging, the battery is removed from the QIKDOC dock and is placed on a separate charging station. This charging station can charge 3 batteries simultaneously and can be powered by a single 10amp power outlet. The charging station can also be mobile, enabling it to be relocated for convenient access.

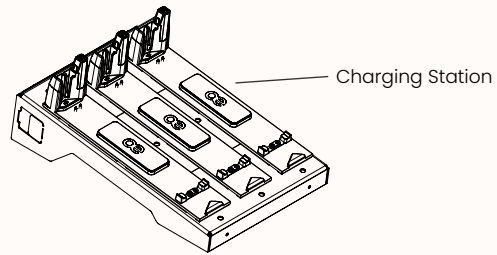

Battery Locations:

There are two pre-defined battery positions, either in the center of the table, or offset to one end. The battery location can be specified to align with the needs of the occupants. When Kissen conference is folded, battery will not fall from its dock. An optional additional PIP module is located at the other end of the table. The PIP module provides a single USB-A and single USB-C outlet

